

FIG. 1

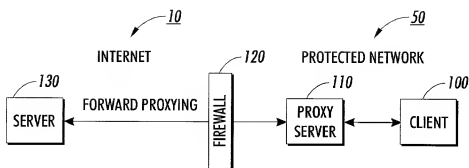


FIG. 2A

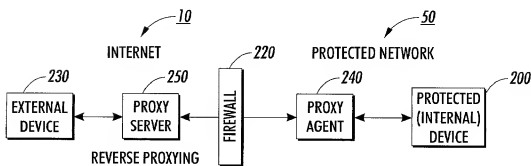


FIG. 2B


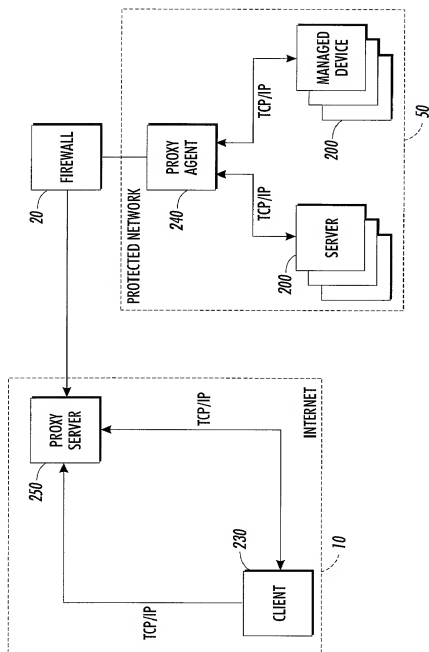


FIG. 3

PROXY SERVER IS CONFIGURED TO USE
 PROXY PORT A TO GET AT NETWORK A,
 THEN RECONFIGURED TO USE PORT B
 TO GET AT NETWORK B.

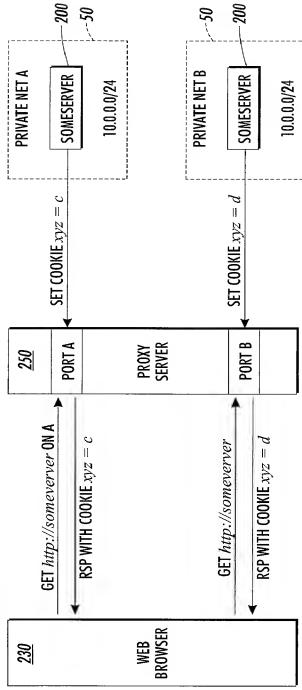

BROWSER CANNOT DISTINGUISH URL *http://someserver-on A* FROM URL
http://someserver-on B. HENCE COOKIE_xyz=d FROM B OVERWRITES
 COOKIE_xyz=c FROM A, SINCE IT IS RECEIVED LAST.

FIG. 4

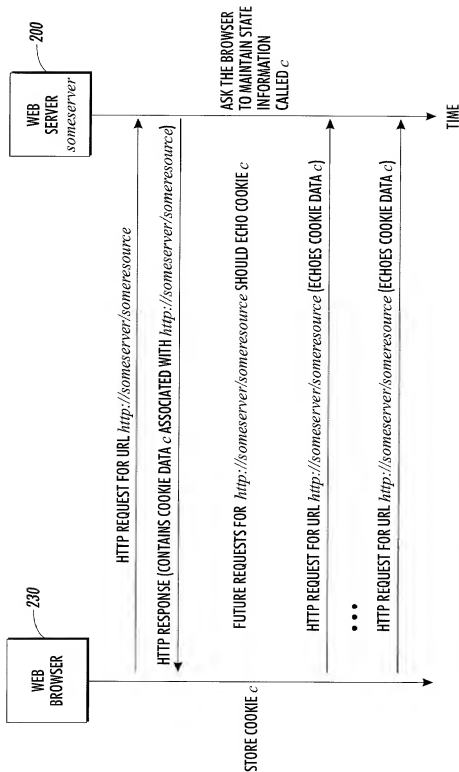


FIG. 5

